

Revision 2.f Release Date August 10th 2007

Revision Notes Format

## Technical Specifications Summary

Frequency Range:	2 - 30 MHz	Gain:	18dB
P1dB:	200 Watts CW	Efficiency:	42%
Class:	AB	Temperature Range:	0 to 70°C
Supply Voltage:	50.0V	Max VSWR:	5:1

## Amplifier General Description

The P300-2-30-18 is a rugged integrated MOSFET amplifier building block which requires only power and input and output connections. Offering high gain and efficiency in a cost effective package, this Pallet Amplifier is the natural choice for a high power RF building block in broadband communications applications from 2-30 MHz.

- NO RF Assembly or Circuit Tuning!
- 18 dB Typical Gain 2-30 MHz!
- 55% Typical Drain Efficiency!
- Analog Temperature Monitor
- Amplifier Disable Input
- Temperature Compensated Bias
- Copper Baseplate

## Amplifier Picture

**Delta RF Technology, Inc.**

High Power RF Amplifiers and Accessories

350 South Rock Boulevard • Reno • NV • 89502 • USA

Phone +1.775 DELTA RF [775 335 8273]

Fax +1.775 DELTA FX [775 335 8239]

website: <http://www.drft.com>email: [sales@drft.com](mailto:sales@drft.com)

Parameter	Min	Typ	Max	Units	Notes
Frequency	2		30	MHz	
P1dB	300			W, CW	Derate linearly to 200w <sub>cw</sub> above 50°C BP temp For 2 tones, 10kHz spacing, 300 W PEP
IMD3	-30			dBc	
Power Input		4.8	7.5	W, CW	
Gain	16	18		dB	
V <sub>supply</sub>		50		V, DC	
Drain Current		11		A, DC	
Input VSWR		1.5:1	1.8:1		
Insertion Phase Variation		10		°	Unit to unit
Gain Variation		±1		dB	Unit to unit
F2 Second Harmonic		-35		dBc	
F3 Third Harmonic		-15		dBc	
Baseplate Operating Temperature	0		+70	°C	

Physical Dimensions 5.0" x 3.0" x 2.0" 13cm x 18cm x 5cm

All specifications valid for 50 Ω output load, V<sub>sup</sub> = +50VDC, I<sub>dq</sub> = 1.0A

## Absolute Maximum Ratings


Parameter	Value	Units	Notes
Maximum Operating Voltage	+55.0	VDC	
Stable Operating Voltage	+48.0 to +52.0	VDC	
Maximum Bias Current, Q100	3.0	A	
Maximum Drain Current	13	A	
Load Mismatch Survival	5:1		Derate to 2.5:1 above 50°C BP temperature
Storage Temperature	-40 to +105	°C	
Maximum Operating Baseplate Temp	+70	°C	

## Features, Auxillary Functions

- ◆ Temperature Compensated Bias
- ◆ Amplifier Disable
- ◆ Current Sense
- ◆ Connectorized Power



## Electrical Connections:

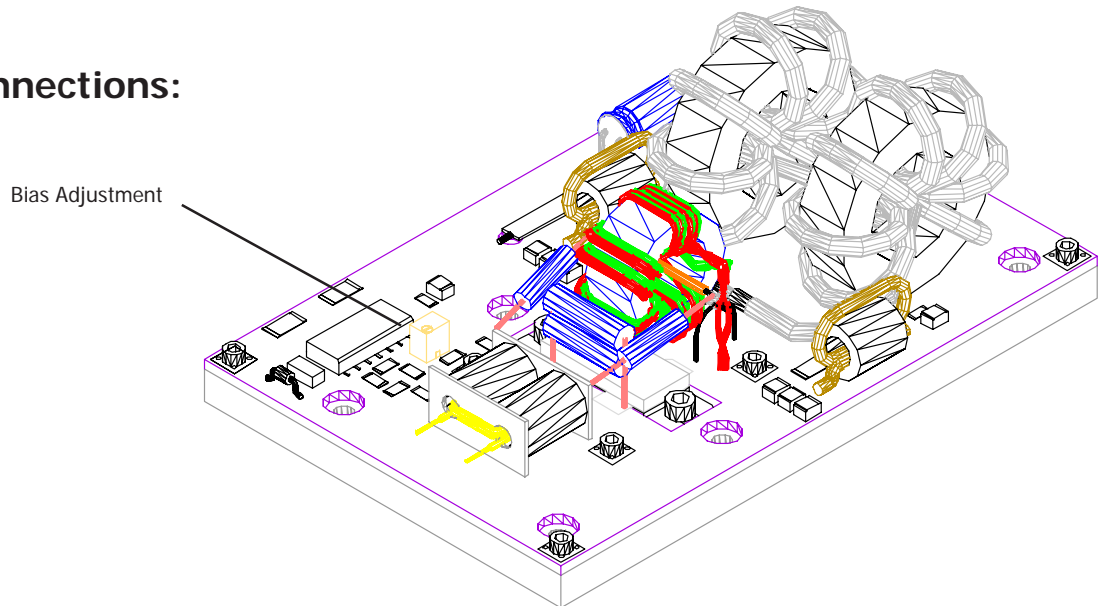

### Connections:

Connect amplifier to +Vsup and Ground by soldering directly to pads on top of amplifier. If using Single connection, 12 gauge wire is recommended, 12 gauge ground wire. Connect coaxial cable to input and output RF connections (semi rigid or flexible) using best RF practices. Ensure output cable is of sufficient power handling rating. Pads are provided for ground on co-axial connections.

### Amplifier Startup

+Vsup should be applied to amplifier with no drive applied. The system must allow drain voltage to reach +40V minimum before applying drive or damage will result to the amplifier and void warranty. This typically takes between 1-2 seconds and should be verified by the system integrator.


### Bias Current:

Bias has been pre-set at the factory to 1.0A at +50.0V DC. This bias point has been selected to offer the optimum balance between gain and efficiency. This unit is intended for class AB operation. If the bias point is changed, take great care not to exceed the maximum bias listed on page 1.


### Amplifier Shutdown

To prevent damage to amplifier and surrounding systems, drive should be removed prior to powering down PA. Please note that as with any class AB amplifier, even when no drive is applied, the output of the amplifier can still be active when presented with an odd load.

+Vsup Solder Pad                      Ground Solder Pad

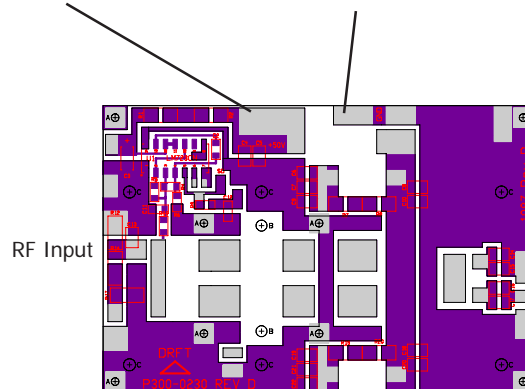

## Mechanical Specifications

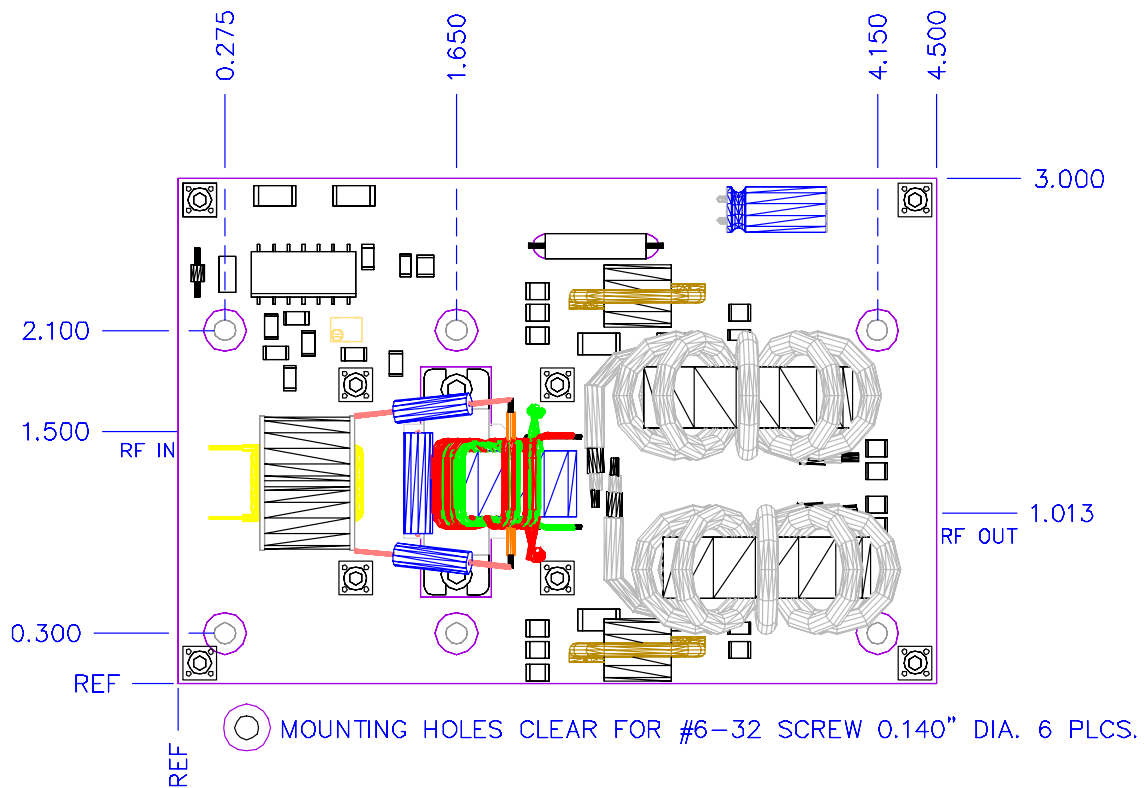

### Tips for Mechanical Mounting:

- 1 All holes are clear for #6 Screw. Stainless Steel mounting hardware is recommended, grade 18-8 or better. A lock washer of same material should also be used.
- 2 Ensure mounting surface is flat to better than 0.003" / "
- 3 Use a thin layer of thermal compound on the backside of the PA - no more than 0.001" - 0.002" thickness!
- 4 Torque all screws to 10-12 in-lbs

### Considerations for Mechanical Mounting:

- Considerations for proper thermal design include
- Total power dissipated = Total DC Power Consumed x (1-Efficiency)
- Ambient Airflow
- Thermal Resistance of Heat Sink



**Ordering Information:**

Order Code	Description	DRFT Reference
P300-2-30-18	300W Class AB HF Pallet Amplifier	1486
PAB300-2-30-18	Amplifier in Enclosure	TBD

**Options**

-A11	SMA Female Connectors In / Out	0201
-A12	Heat Sink Option	0202
-A13	Heat Sink Option with DC Fan, pre wired	0203
-A14	Ruggedized for vibration	0204
-A15	Wire harness, 1' length, 10 wires for pallet amplifier only (NON-FM)	0205
-A16	Wire harness, customer specified length for pallet amplifier only	0206
-T2	Extended Burn In	0271
-T3	Extended Data Collection	0272

**Standard Pallet Options:**

**SMA Female Connectors**, Input and Output. Stainless Body, Gold Center pin, 4-hole SMA bolted to pallet amplifier edge through bottom two holes located at amplifiers RF IN and RF OUT locations. All stainless steel hardware.

**Enclosure**- all aluminum machined enclosure available for most pallet amplifiers. Alodined aluminum, alloy 6061-T6. SMA Female input and output RF connectors. Supply voltage and ground through solder / feedthrough connections. Module must be bolted to appropriate heatsink.

**Heat Sink** - aluminum extruded heat sink, black anodized. Pallet amplifier or module will be bolted to heatsink. Customer will be required to provide adequate airflow.

**Heat sink with fan** - aluminum extruded heat sink as above, with included fan bolted to push air through the heat sink. Depending on heat requirements, a second fan may also be provided on the output of the unit.

**Ruggedized** - all screws have threadlocking compound applied, and all flying components are staked and attached to base. Designed to withstand MIL-STD-810E 514.4 Category 8.

**Power Connector** - a 10 pin molex connector is used on all standard pallet amplifiers to supply +Vsup and Ground connections, as well as hi-side current shunts for current monitoring. Delta RF offers the mating connector with 1' wires - Red (Vsup), Black (Ground), Yellow (Current monitor). All wires are 18 gauge teflon insulated wires. Customer may optionally specify wire length and wire color.

**Testing Options:**

**Standard** - includes power test and brief burn - in under laboratory conditions. Printed test report gives graph of Gain and Input Return Loss at rated P1dB and Voltage Conditions. Report shows pass/fail criteria. All amplifiers include this test.

**Extended burn in** - 8-hour burn in at P1dB with standard test run at completion. Unit is monitored during test and any discrepancy reported. Standard test data is included.

**Extended data collection** - Standard data is run and included. Detailed data is taken point by point giving the customer 25 - 70 frequency points, depending on the amplifier model. For each frequency point, data is generated to include gain, input power, input return loss, current, second harmonic, third harmonic, efficiency, audio distortion.

Other tests available - Vibration, Temp cycling, Shock. Please inquire.

The specifications contained herein are subject to change without notice. Delta RF Technology, Inc. assumes no liability for the use of this information.

This data sheet and contents are the property of Delta RF Technology, Inc. © Delta RF Technology, Inc. 2007.

